

Three-dimensional digital mapping of ecosystems: a new era in spatial ecology

D'Urban Jackson, Tim; Williams, Gareth J.; Walker-Springett, Guy; Davies, Andrew

Proceedings of the Royal Society B.

DOI:

[10.1098/rspb.2019.2383](https://doi.org/10.1098/rspb.2019.2383)

Published: 12/02/2020

Peer reviewed version

[Cyswllt i'r cyhoeddiad / Link to publication](#)

Dyfyniad o'r fersiwn a gyhoeddwyd / Citation for published version (APA):

D'Urban Jackson, T., Williams, G. J., Walker-Springett, G., & Davies, A. (2020). Three-dimensional digital mapping of ecosystems: a new era in spatial ecology. *Proceedings of the Royal Society B.*, 287(1920), [20192383]. <https://doi.org/10.1098/rspb.2019.2383>

Hawliau Cyffredinol / General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

PROCEEDINGS OF THE ROYAL SOCIETY B

BIOLOGICAL SCIENCES

Three-dimensional digital mapping of ecosystems: a new era in spatial ecology

Journal:	<i>Proceedings B</i>
Manuscript ID	RSPB-2019-2383.R2
Article Type:	Review
Date Submitted by the Author:	20-Jan-2020
Complete List of Authors:	D'Urban Jackson, Tim; Bangor University, School of Ocean Sciences Williams, Gareth; Bangor University, School of Ocean Sciences Walker-Springett, Guy; Bangor University, School of Ocean Sciences Davies, Andrew ; Bangor University, School of Ocean Sciences; University of Rhode Island
Subject:	Ecology < BIOLOGY, Environmental Science < BIOLOGY
Keywords:	digital ecology, ecosystem science, remote sensing, 3D mapping, terrestrial laser scanning, structure-from-motion photogrammetry
Proceedings B category:	Ecology

SCHOLARONE™
Manuscripts

Three-dimensional digital mapping of ecosystems: a new era in spatial ecology

Tim D’Urban Jackson^{1*}, Gareth J. Williams¹, Guy Walker-Springett¹ and Andrew J. Davies^{1, 2}

¹**School of Ocean Sciences, Bangor University, Anglesey, LL59 5AB, UK**

²**Department of Biological Sciences, University of Rhode Island, Kingston, RI, USA**

***Corresponding author**

Email: t.d.jackson@bangor.ac.uk

Tel: +44 (0)1248 38 3967

Orchid IDs:

TDJ 0000-0001-7077-2186

GJW 0000-0001-7837-1619

GWS 0000-0002-4544-7573

AJD 0000-0002-2087-0885

Abstract

Ecological processes occur over multiple spatial, temporal and thematic scales in three-dimensional ecosystems. Characterising and monitoring change in 3D structure at multiple scales is challenging within the practical constraints of conventional ecological tools. Remote sensing from satellites and crewed aircraft has revolutionised broad-scale spatial ecology, but fine-scale patterns and processes operating at sub-metre resolution have remained understudied over continuous extents. We introduce two high-resolution remote sensing tools for rapid and accurate 3D mapping in ecology – terrestrial laser scanning and structure-from-motion photogrammetry. These technologies are likely to become standard sampling tools for mapping and monitoring 3D ecosystem structure across currently under-sampled scales. We present practical guidance in the use of the tools and address barriers to widespread adoption, including testing the accuracy of structure-from-motion models for ecologists. We aim to highlight a new era in spatial ecology that uses high-resolution remote sensing to interrogate 3D digital ecosystems.

Keywords: digital ecology, ecosystem science, remote sensing, 3D mapping, terrestrial laser scanning, structure-from-motion photogrammetry

Introduction

Understanding how ecosystems vary in space and time underpins land- and seascape management, but to be effective, accurate and comprehensive information must be captured across multiple scales. Our knowledge of ecosystems represents decades of observations by ecologists using field equipment like quadrats, to capture biological information, and theodolites or satellite positioning systems (e.g. GPS) to record habitat topography. Direct observation field techniques capture detailed habitat information but are labour and resource intensive, resulting in trade-offs between three types of scale: spatial, temporal and thematic, and their components of resolution and extent [1,2]. For example, an abundance survey of all macro-organisms to species level (high thematic resolution and extent) with sampling at 1 m intervals (high spatial resolution) cannot feasibly cover an extent of 1 km² (limited spatial extent) or if it does, would take a very long time (limited temporal resolution). The impracticality of conventional methods for spatially or temporally continuous sampling has led to an average difference of 5.6 orders of magnitude between the extent represented and extent actually sampled in ecological studies, necessitating interpolation or extrapolation with the risk of over-leveraging data [3].

Disruptive remote sensing technologies to rapidly record detailed, spatially-referenced biological and physical information are now accessible to the field ecologist. These techniques overcome some of the logistical challenges and trade-offs of direct observation field sampling and extend the scales of remote sensing capability. This review considers tools able to capture three-dimensional (3D) ecosystem data at finer scales than can be achieved with more familiar remote sensing from satellites or crewed aircraft. We present an introduction to two of the most powerful and accessible high-resolution 3D mapping techniques, which hold enormous potential for the rapid collection of ecologically relevant, spatially continuous data at multiple scales: terrestrial laser scanning and structure-from-motion photogrammetry (figure 1). Uptake of these new technologies varies widely across disciplines and user groups, and there is a strong case for their increased adoption in ecology. Our primary audiences are ecologists, environmental managers and other interested parties who have limited or no experience with these high-resolution remote sensing tools. We direct more experienced

users to our analysis of the accuracy of structure-from-motion photogrammetry models at scales and contexts relevant to ecological studies, addressing a key barrier to uptake. Our aim is to shed light on powerful and increasingly user-friendly tools, encourage innovative and novel analytical approaches, and highlight the new era of 3D digital spatial ecology.

Remote sensing in ecology

Remote sensing from satellite and crewed aircraft has revolutionised spatial ecology with diverse applications that continue to grow as technology advances in capability, accessibility and familiarity. Passive earth observation from satellites has enabled global-scale mapping and monitoring of land cover, ecosystem function and climatic variables [4], and now offers metre-resolution daily imagery of anywhere on the globe, presenting new opportunities for ecology, conservation and management [5]. Active spaceborne sensors have facilitated the study of broad-scale (km to global) ecosystem structure [6], enabling estimation of global ocean bathymetry [7] and continuous global topography [8]. The ICESat-2 laser altimetry mission will have ecosystem characterisation applications through mapping heights of ice, vegetation canopy and freshwater bodies [9], as well as unanticipated potential for nearshore bathymetric mapping [10].

Remote sensing from crewed aircraft provides similar data products to satellite sources at higher resolution over smaller extents. Airborne laser scanning has become a widely used tool for characterising 3D habitat structural complexity and exploring organism-habitat relationships [11,12]. Bespoke or repeat airborne laser scanning surveys are uncommon in academic research due to high operating costs of crewed aircraft, and compatibility issues pose challenges for the analysis of existing available data [13].

Satellite and crewed aircraft remote sensing is irreplaceable for continuous mapping at up to global extents. However, the technique becomes logistically inappropriate when detailed information is required across smaller spatial extents (metres to hectares) or shorter time periods (hours to weeks) due to limits of data resolution, accuracy or cost. For 3D mapping at these scales, recent technological

advances have led to the emergence of high-resolution (millimetre to centimetre), rapidly deployable remote sensing tools that include terrestrial laser scanning and structure-from-motion photogrammetry (figure 1) [14–16]. Advancement in sampling technology drives an ever-expanding range of questions we can ask about the natural world, and the ability to accurately map ecosystems in three or more dimensions is changing the way we study their ecology and management [11,13,17].

High-resolution remote sensing tools for spatial ecology

Terrestrial laser scanning and structure-from-motion photogrammetry both generate accurate, high-resolution digital 3D models of the environment in the form of a point cloud (figure 1). A point cloud is simply a collection of individual points with X, Y and Z coordinates describing their 3D position. Additional attributes can be added to each point to provide information such as colour or other local statistic. From point clouds, other topographic data products like mesh models and rasters can be generated for additional analyses (figure 1). Although their outputs appear similar, terrestrial laser scanning and structure-from-motion photogrammetry generate point clouds in different ways, resulting in differences in the point cloud characteristics. For an overview of data collection steps using these two techniques see figure 2.

Terrestrial Laser Scanning

Using the same principles as airborne laser scanning, terrestrial laser scanning is a high-precision ground-based survey technique used extensively in civil engineering. It is an active remote sensing approach that builds an accurate model of the surroundings by emitting millions of laser pulses in different directions and analysing the reflected signals [18]. Data collected using calibrated laser scanning equipment have intrinsic precision and real-world scale.

Terrestrial laser scanning is conducted from a set of discrete stations using a tripod-mounted instrument, collecting data radially from a low elevation (generally < 2 m). This results in a reduction

in both point density and angle of incidence to the ground with increasing distance from the scanner, and sectors of missing data behind obstructions like trees. Regions with low point density are filled by merging data from multiple scanning stations (figure 2), introducing a low level of quantifiable error. Data extent, resolution and coverage must be balanced with the survey time needed, especially in complex ecosystems like forests where many stations are required for comprehensive coverage of a large extent. Terrestrial laser scanning typically penetrates through fine-scale features like vegetation to record points on internal surfaces (e.g. branches) and the ground, as the independent laser pulses can travel through small gaps. Compared to crewed airborne systems, terrestrial laser scanning offers higher resolution, more accurate data from a near-ground perspective, with lower operating costs and responsive deployment capability, but across a more limited survey extent.

Falling costs and improved portability have increased the accessibility of terrestrial laser scanning to a wide variety of users [15,18]. Custom built versions have lowered costs even further [19], although the equipment and software required is still expensive compared to structure-from-motion photogrammetry, and may be prohibitively so for some users. Early adoption of terrestrial laser scanning for natural sciences was concentrated in the fields of geography and geoscience [18,20]. More recently it has seen application in ecology [13], particularly in forest ecology where the below-canopy perspective complements airborne data collection. Applications include quantifying biomass, growth and 3D structure of forest vegetation [15,21–24], non-destructive estimation of above ground grass and mangrove biomass [25,26], assessing vegetation water content [27], studying cave-dwelling bat and bird colonies [28,29], mapping freshwater habitats [30] and exploring the relationships between organisms and fine-scale topography [31,32].

Structure-from-motion photogrammetry

Structure-from-motion photogrammetry is a low-cost machine vision technique that enables the reconstruction of a detailed 3D model from a set of overlapping two-dimensional digital photographs [33]. The camera may be handheld or pole-mounted for small scenes, while drone-mounted cameras

are commonly used to capture larger extents [34]. Commercial adoption of structure-from-motion is increasing as a low-cost, flexible survey tool, but questions remain over best practices for producing repeatable and high quality outputs.

With structure-from-motion photogrammetry, the geometry of a scene is reconstructed from the relative positions of thousands of common features detected in multiple photographs taken from different vantages. Structure-from-motion is a passive remote sensing technique because photographs capture reflected light from an external source like the sun. While a basic model can be generated entirely automatically, manual input into the processing stage is required for accurate outputs. Structure-from-motion models have no inherent real-world scale, so known coordinates or distances must be incorporated to generate scale. There is greater opportunity for error introduction with structure-from-motion compared to terrestrial laser scanning, and uncertainty in data outputs varies widely and unpredictably within [35] and among studies [36]. For example, error can be introduced through camera lens distortion, poorly focused images, movement of features in the scene, and imprecision in manual processing stages. Care must be taken to minimise the propagation of error through the model construction pipeline [36]. Structure-from-motion generates more homogenous and comprehensive data coverage compared to terrestrial laser scanning in less time, because the camera is moved around the scene, often using an aerial platform. However, multiple images of a point on a feature are needed to calculate a position, so internal surfaces of complex features (e.g. branches of a dense bush or coral), shaded surfaces and moving features (e.g. blades of grass in the wind) are less likely to be captured or positioned accurately. Structure-from-motion tends to return a generalised outer surface of such features, lacking finer details.

The algorithms used for structure-from-motion are computationally demanding but falling costs of computer processing power and affordable, user-friendly software are making this technique increasingly accessible (see [36] for popular software options). As with terrestrial laser scanning, structure-from-motion saw early adoption in geography and geoscience [33]. Ecological applications include modelling forest and vegetation structure and biomass [25,34,37,38], and quantifying fine-scale habitat topography and structure [14,39–41]. Recently there has been particular interest in

underwater structure-from-motion for measuring and mapping 3D habitat complexity in coral reef systems [42–44].

Georeferencing

Georeferencing is required to position 3D data generated using terrestrial laser scanning and structure-from-motion in real-world space. Positions of equipment (e.g. laser scanner, drone) or identifiable features (e.g. targets) are typically recorded using a survey grade Global Navigation Satellite System (GNSS) with an accuracy of 1-3 cm. This stage can represent one of the largest sources of error in the 3D modelling processing pipeline. The influence of georeferencing error on terrestrial laser scanning and small-extent structure-from-motion data (e.g. $< 100 \text{ m}^2$) can be minimised by incorporating it at a late stage in processing, and with low weighting. However, with large scenes modelled with structure-from-motion using drones, georeferencing using well-distributed ground control points must be incorporated into the process at an earlier stage to provide scale, and prevent warping of geometry [45]. With sub-centimetre-resolution 3D data, georeferencing error can be a limiting factor for detection of fine-scale change in topography through time [32], and for estimating the accuracy of survey techniques [46], demanding positioning technology with sub-centimetre accuracy (e.g. Total Station).

Accuracy of structure-from-motion models in ecological settings

Structure-from-motion photogrammetry can achieve impressive accuracy, but the flexibility of the technique makes it vulnerable to the introduction of error that is method and context specific. Most assessments of accuracy in natural settings have been in the field of geoscience, with measurement error varying from $< 1 \text{ mm}$ to over 3 m and somewhat dependent on the distance between camera and surface [36]. The spatial scales of ecological patterns often include the very fine ($< 10 \text{ cm}$), so an estimate of the realistic achievable accuracy of structure-from-motion photogrammetry is crucial to assess its usefulness to ecologists and environmental managers.

We compared structure-from-motion and terrestrial laser scanning models within three habitats (rocky shore, honeycomb worm (*Sabellaria alveolata*) biogenic reef and saltmarsh) and at three ecologically relevant scales (fine-scale: 25 m² with < 1 cm resolution, medium-scale: 2500 m² with < 2 cm resolution, and broad-scale: 2500 m² with 5 cm resolution). Fine-scale photographs were collected using a pole mounted camera (Canon EOS M, 22mm lens), while medium- and broad-scale photographs were collected using a drone (DJI Phantom 3 Pro) flying at 25 m and 90 m altitude, respectively. Terrestrial laser scanning data were used as “truth” because it is a commercially recognised technique with known precision (6 mm at 50 m range), and the most accurate 3D mapping technique we were aware of. Structure-from-motion and terrestrial laser scanning surveys were conducted simultaneously using shared reference targets, to avoid the introduction of georeferencing error. Survey and data processing protocols were designed to achieve maximum accuracy. Models were compared as point clouds using the M3C2 algorithm implemented in the open source software CloudCompare, designed for comparison of 3D point clouds from natural scenes containing surface complexity at multiple scales [47,48]. Comparison of point cloud data avoided the introduction of error by the more common approach of interpolating and averaging data to a raster format digital elevation model (DEM) [46]. For detailed methods see electronic supplementary material, S1.

We found mean absolute distance (± 1 standard deviation) between structure-from-motion and terrestrial laser scanner data ranged from 4 mm \pm 14 mm (fine-scale, rocky shore) to 56 mm \pm 111 mm (medium-scale, saltmarsh) (figure 3). In all cases, distances between the point clouds clustered close to zero, indicating good average agreement, with positive and negative errors compensating each other. The spread of measured distances varied, with fine-scale and stable substrate scenes showing the least variation, while broad-scale and vegetated scenes showed the most (figure 3). Visual inspection of model difference maps and cross-sections revealed that on average structure-from-motion models were accurate, but as resolution decreased, sharp features became smoothed, with cuboid reference objects being represented as mounds (electronic supplementary material, figure S2). Similar results are reported in other studies, with high agreement between structure-from-motion

and terrestrial laser scanning at fine-scales of up to 1 m² [25,49] and centimetre-level accuracy at broad scales (hectares) [46,50].

A case for increased adoption of 3D mapping techniques in ecology

Terrestrial laser scanning and structure-from-motion photogrammetry offer rapid, detailed, continuous extent 3D mapping of ecosystems. Relieving scale-dependence of sampling and easing trade-offs in scale presents opportunities to ask new questions of the natural world and revisit classical paradigms at new scales. The potential applications for high-resolution 3D mapping techniques are vast, and like satellite remote sensing and airborne laser scanning, much of their value will likely only emerge once techniques are firmly established as standard ecological tools. Unique insights are already being generated, particularly in forest and coral reef ecosystems [51], whereas adoption has been slower in other systems such as intertidal habitats. Multiscale topography plays a critical structuring role in the intertidal zone by controlling environmental conditions and field time is constrained by tidal cycles, making rapid 3D mapping tools valuable to intertidal field ecologists. In this section we identify and discuss several themes of study in which emerging techniques have either already found innovative and transformative applications or are likely to have high impact in the near future (figure 4).

Understanding relationships between organisms and habitat structure

Analyses of organism-habitat relationships can be hampered by our ability to quantitatively capture the environment. This has resulted in a diversity of definitions, metrics and methods employed to understand the mechanisms behind system-independent phenomena like habitat complexity-biodiversity relationships [52]. The analysis of digital representations of 3D habitat structure to derive system- and scale-independent metrics, like fractal dimension [53], or novel organism-centric metrics [54], could lead to improved understanding by reducing the need to simplify 3D habitat structure (e.g. to 2D profiles) to facilitate analysis [42,43,52,55,56].

Spatial patterning and the patchiness of species across a landscape can depend on topography at multiple scales. In tidal flats and flood plains, elevation changes in the order of centimetres can control species distributions, interactions and ecosystem services [14]. Understanding fine-scale relationships can improve species distribution and habitat suitability modelling, a valuable management tool, and lead to advances in organism-perspective landscape analysis. Terrestrial laser scanning was used to estimate topographically-controlled foraging habitat suitability for the black oystercatcher (*Haematopus bachmani*) and model how it may change under future sea-level rise [31]. Fine-scale topography and 3D structure can control other variables that can be modelled in finer scales than ever before, like microclimate [57], soil pH [58] and hydrodynamic forces [59]. This can enable quantification of environmental variables as continuous rather than categorical factors, which may lead to alternative or improved interpretations of organism-environment relationships [60,61].

Measuring and monitoring small, slow and complicated variation in 3D form

Improved morphological descriptions of complex natural shapes can be made with comprehensive 3D data, and variation in such shapes can be monitored through space and time at an organism-relevant resolution. Using terrestrial laser scanning, researchers found that oysters, an ecosystem engineer, can grow reef structure at a faster rate than current sea-level rise, with important management and conservation implications [62]. Coral reef structure is difficult to quantify and previous methods known to poorly capture detailed topography, like the chain-and-tape method, can now be replaced with more repeatable structure-from-motion surveys with similar in-water effort [42,43]. Through accurate feature modelling, terrestrial laser scanning can improve on traditional allometric equation methods to estimate above ground biomass in trees (9.68% overestimation compared to 36.57–29.85% underestimation) [63]. The low cost of operation and rapid deployment capability of terrestrial laser scanning and structure-from-motion make them suitable for opportunistic pre- and post-event change detection [64] and environmental impact assessment monitoring.

Virtual sampling, digital archiving and addressing problems of scale in ecology

With sampling now achievable at sub-centimetre resolutions, ecosystems can be digitally captured to a degree that in some instances exceeds the resolution possible using *in situ* human observation. There are, however, still limitations of completely removing the human observer element. Macroalgal canopy cover estimates on rocky shores are indistinguishable between “virtual quadrats” from drone-derived image mosaics and *in situ* human observers using field quadrats, but understory turfing algal species are under-sampled in virtual quadrats [65]. Sampling of cryptic species and multi-layered features will remain challenging to sample using remote sensing. Despite some limitations, the potential advantages of sub-centimetre digital mapping of ecosystems are hugely exciting, including automated species detection and identification using machine learning [66], entire extent sampling that removes interpolation issues when scaling up from replicate samples [3], and simultaneous biological and environmental sampling [65] (figure 4). Capturing and archiving detailed digital snapshots of ecosystems in a rapidly changing world is likely to prove invaluable for future, currently unknowable analytical approaches.

Organisms interact with their environment at a range of scales, but understanding scale-dependent patterns and processes is a long-standing challenge in ecology [67,68]. Observation of organisms and their environment is often conducted at spatial, temporal and thematic scales that are human-centric and chosen arbitrarily or logistically, rather than guided by the ecological processes being studied [1,67,68]. Due to the versatility of high-resolution remote sensing methods like terrestrial laser scanning and structure-from-motion, studies can now be conducted at scales that have previously been underexplored in ecology (figure 1) [3]. One of the difficulties in multiscale analysis is the time and resource constraints of sampling the same extent at different resolutions [1]. With the ability to rapidly sample large extents at high-resolution, multiscale data can be digitally generated by resampling. We have increasing flexibility to move away from arbitrarily chosen sampling scales and observe ecosystems at ecologically relevant and mechanistic scales.

306 *Value to managers, policy makers and the public*

307 In a rapidly changing world, tools to efficiently record accurate, detailed snapshots of the environment
308 and monitor ecosystem health are extremely valuable to environmental managers and policy makers.
309 Policy makers require high quality environmental information to make evidence-based decisions
310 aimed at limiting environmental impact, conserving ecosystems and maintaining ecosystem services,
311 to the benefit of the public. Often availability of technology to environmental managers is not
312 limiting, but without practical information on how to efficiently utilise tools, and analyse and interpret
313 new data types with confidence, there may be a lag in adoption of emerging technologies in favour of
314 more familiar methods, despite their known limitations [69,70]. A benefit of high-resolution 3D
315 mapping technologies for public facing research groups and environmental bodies is the easily
316 interpreted visual data products generated. Photo-realistic 3D models of ecosystems aid explanation of
317 ecological processes and issues, improving public communication and education through digitally
318 annotated still images, animations or virtual reality systems.

319

320 **Barriers to wider uptake in ecology**

321 While some sub-disciplines of ecology are making headway in using high-resolution remote sensing
322 methods to answer questions and test ecological paradigms across scales, in general the methods
323 remain underutilised across the discipline. A Web of Science search conducted in December 2019
324 found that just 1.4% (59 out of 4348) of articles about terrestrial laser scanning or structure-from-
325 motion were categorised as “ecology” compared to 23.7% (1031) categorised as “geosciences
326 multidisciplinary”. Further, 67.8% of these articles were published in the last three years
327 (2017–2019), highlighting the emerging adoption of these techniques. Here we identify four
328 perceived barriers to wider uptake in ecology.

329 Firstly, potential users may be unaware that such techniques exist, so a major aim of this article is to
330 introduce ecologists and environmental managers to two of the most common and powerful
331 techniques in an accessible manner. Second, potential users may be somewhat aware of the techniques

discussed, but perceive them to be specialised tools and inaccessible due to high expertise, cost or time requirements. Technological advances in hardware and user-friendly software mean non-specialists can now be using these techniques in a basic form within a day with a small amount of training or self-learning. Equipment, software and training costs can still be significant, especially for terrestrial laser scanning, with further costs incurred for maintenance and insurance. However, the multidisciplinary applications of the techniques mean many institutions will already have access to suitable equipment and software, or can gain access to shared resources. Structure-from-motion costs can be comparable to many other field techniques, especially if using a handheld camera and open source software. Practical field time requirements are context dependent. In coastal habitats we found that terrestrial laser scanning took 15 – 20 min between stations for a typical medium resolution (10 cm point spacing at 100 m range) survey. Structure-from-motion time requirements ranged from approximately 20 minutes for a 25 m² area surveyed using a pole mounted camera, to 2 hr for a 10 ha area surveyed at 2-cm resolution using a multi-rotor drone (45 m altitude). As a photographic technique, structure-from-motion is slowed or halted in low-light, while terrestrial laser scanning can be conducted in darkness. Processing of terrestrial laser scanning data is rapid (1 – 2 hr) and can even be conducted on a laptop in the field directly after surveying. Processing a basic structure-from-motion model can be achieved in a similar amount of time, but an accurate, detailed model typically takes a day or more to process depending on processing power and number of images. For a comparison of practical considerations for terrestrial laser scanning and structure-from-motion for geoscience see [71].

A third possible barrier to uptake in ecology is that potential users are aware of 3D mapping tools and understand how they are conducted but do not see value in their use, or are resistant to exploring technology-based alternatives to traditional field methods. Technology is unlikely to ever completely replace a human ecologist in the field for direct observation and interpretation, but can augment data collection and improve efficiency and quantification of specific variables if used appropriately [72]. By separating tasks that require human engagement from those that are more efficiently performed using technology, field time can be optimised [65]. These technologies allow us to test existing

ecological concepts at novel scales and inspire new questions that could result in novel paradigms and understanding.

Finally, potential users may be aware of the techniques and understand how they are conducted but are sceptical about the accuracy of the outputs at their spatial scales of interest; this is especially relevant for structure-from-motion photogrammetry. To address this, in this paper we have presented results from an assessment specifically to test the realistic accuracy and characteristics of structure-from-motion models in contexts and at spatial scales relevant to ecologists and environmental managers (figure 3). Our results demonstrate that millimetre to centimetre scale variation in topography can be measured in space and time using high-resolution 3D mapping techniques in the field, making them valuable for numerous ecological applications (figure 4).

The perceived barriers to adoption of 3D mapping techniques for ecological data collection are now low. However, system-specific challenges remain in survey design, data processing and interpretation. With terrestrial laser scanning in complex environments, line-of-sight obstructions and moving vegetation combined with the spatial characteristics of the point cloud data generates challenges for interpretation and analysis [49,73,74]. While the moving vantage aspect of structure-from-motion data capture means more homogenous data coverage, repeatability of coral reef rugosity measurements were impacted by high habitat complexity, environmental conditions and variation in methods [75]. The use of drone-mounted sensors for field ecology comes with an additional suite of considerations for training, permissions and constantly evolving regulations that govern their safe and legal usage [76]. Data processing still requires manual input at various stages, and automated workflows can be computationally demanding, especially for structure-from-motion. Various algorithms and software packages are being developed for 3D point cloud processing, including open source projects like CloudCompare [48]. After the initial processing stages required to generate a 3D model, further processing and analysis currently requires non-trivial technical skill or novel approaches specific to the task. As 3D methods become more common in ecology, an increase in demand and funding for user-friendly and powerful processing techniques, including packages for open-source platforms like Python and R, can be expected.

Conclusion

Technology is available and accessible to non-specialist ecologists that enables the detailed mapping of habitats and organisms accurately in 3D. These techniques unlock a wealth of new spatial and temporal ecological questions that were logistically impossible to ask only a few years ago. As with any sampling method the limitations should be understood as uncertainty may not be readily detected, and there is a need for standardisation of protocols. The power of these techniques mean they are rapidly becoming standard and essential tools in various disciplines. By embracing emerging technologies, modern ecologists can overcome longstanding challenges in studying scale-dependent organism-environment relationships. Digital ecosystem analysis and multiscale 3D spatial ecology is continuing to evolve, and high-resolution remote sensing techniques are becoming instrumental as part of the modern spatial ecologist's tool kit.

Acknowledgements

We would like to thank Michael Roberts and Jonathan King for facilitating the study, Adel Heenan and Timothy Whitton for their valuable insights, Steve Rowlands and Steve Carrington for their help with data collection, and Amanda Dillon for creative contribution to figure 4. We also thank two anonymous reviewers and the handling editor Prof. Innes Cuthill for their comments that greatly improved the manuscript.

Data accessibility

Data and R code supporting this manuscript are available in a figshare repository:
<https://figshare.com/s/a623925eb42f4fc32e9a>

410 **Funding**

411 This research was funded by the SEACAMS2 and Ecostructure projects (part-funded by the European
412 Regional Development Fund through the West Wales and the Valleys Programme 2014-2020 and the
413 Ireland Wales Cooperation Programme 2014–2020)

414

415 **Ethics**

416 Land owner permission was granted for all fieldwork.

417

418 **Competing interests**

419 We declare we have no competing interests.

420

421 **Author contributions**

422 TDJ, AJD and GJW conceived and drafted the review. TDJ and AJD designed the primary data
423 component and TDJ and GWS conducted the fieldwork. TDJ processed and analysed the data. All
424 authors helped revise the manuscript and gave final approval for publication.

425

426

427

428

429

430

431

Figure captions

Figure 1.

An overview of high-resolution three-dimensional ecosystem mapping tools, data formats and scales. Tools include terrestrial laser scanning and structure-from-motion photogrammetry. Point cloud data can be processed into mesh formats by interpolating between points, and raster formats to produce digital elevation models (DEMs) by averaging point elevations in a regular 2D grid. 3D information can be analysed at multiple spatial scales from organism to ecosystem. These tools enable investigation at spatial scales (resolution and extent) that are understudied in ecology. Plot shading (adapted from [3]) indicates number of ecological studies at specific scales, dashed areas represent the approximate sampling scales for terrestrial laser scanning and structure-from-motion (using drone-mounted and handheld cameras).

Figure 2.

Major steps for capturing data with terrestrial laser scanning and structure-from-motion using handheld and drone-mounted cameras. A) Identify features of interest and estimate scanning positions or camera angles. B) Set out reference targets for terrestrial laser scanning, or ground control points, check points and scaling objects for structure-from-motion. For laser scanning, targets are used to align data from different stations, although scene geometry can sometimes be used for alignment instead of, or in addition to targets. For structure-from-motion, reference points are used for aligning images and constraining the modelling process, and for accuracy assessment and scaling. C) Terrestrial laser scanning collects data from a number of discrete stations, to be combined during processing. For structure-from-motion, many overlapping photographs are taken, from which a 3D model is generated during processing. D) Georeferencing, typically using a commercial grade Global Navigation Satellite System, is required to position the resulting 3D models in real-world space, and for scaling in large structure-from-motion models.

Figure 3.

Accuracy of a structure-from-motion point cloud quantified as the point-by-point distance to a reference terrestrial laser scanning point cloud in three habitats (rocky shore, biogenic reef and saltmarsh) and at three scales (fine: 25 m² with < 1 cm resolution, medium: 2500 m² with < 2 cm resolution and broad: 2500 m² with 5 cm resolution). Distances were measured at 100,000 points and plotted as density curves, with the area under each curve being equal. Curve tails beyond 0 ± 0.1 m are not shown. Mean absolute error (MAE) \pm 1 standard deviation (m) distance is reported.

Figure 4.

Examples in ecology and environmental management with existing or potential applications for 3D ecosystem mapping. 1) Multiscale experimental design with high-resolution 3D mapping across large extents. 2) Mapping fine-scale variation in topography across tidal flats and wetlands. 3) Automated species identification and biometric measurement in forests. 4) Comparing topographic variation in natural and artificial hard coastal substrates. 5) Digital archiving of 3D habitat structure in inaccessible ecosystems. 6) Monitoring variation in reef topography in space and time. 7) Modelling growth in complex 3D organisms like mangrove trees. 8) Mapping 3D structure in habitats with canopy cover and overhangs.

References

1. Lecours V, Devillers R, Schneider DC, Lucieer VL, Brown CJ, Edinger EN. 2015 Spatial scale and geographic context in benthic habitat mapping: Review and future directions. *Mar. Ecol. Prog. Ser.* (doi:10.3354/meps11378)
2. Rhodes CJ, Henrys P, Siriwardena GM, Whittingham MJ, Norton LR. 2015 The relative value of field survey and remote sensing for biodiversity assessment. *Methods Ecol. Evol.* **6**, 772–781. (doi:10.1111/2041-210X.12385)
3. Estes L, Elsen PR, Treuer T, Ahmed L, Caylor K, Chang J, Choi JJ, Ellis EC. 2018 The spatial and temporal domains of modern ecology. *Nat. Ecol. Evol.* **2**, 819–826. (doi:10.1038/s41559-018-0524-4)
4. Kerr JT, Ostrovsky M. 2003 From space to species: ecological applications for remote sensing. *Trends Ecol. Evol.* **18**, 299–305. (doi:10.1016/S0169-5347(03)00071-5)
5. Asner GP, Martin RE, Mascaro J. 2017 Coral reef atoll assessment in the South China Sea using Planet Dove satellites. *Remote Sens. Ecol. Conserv.* **3**, 57–65. (doi:10.1002/rse2.42)
6. Turner W, Spector S, Gardiner N, Fladeland M, Sterling E, Steininger M. 2003 Remote sensing for biodiversity science and conservation. *Trends Ecol. Evol.* **18**, 306–314. (doi:10.1016/S0169-5347(03)00070-3)
7. Smith WHF, Sandwell DT. 1997 Global sea floor topography from satellite altimetry and ship depth soundings. *Science* (80-.). **277**, 1956–1962. (doi:10.1126/science.277.5334.1956)
8. Farr TG *et al.* 2007 The Shuttle Radar Topography Mission. *Rev. Geophys.* **45**, RG2004. (doi:10.1029/2005RG000183)
9. Seidleck M. 2018 The ice, cloud, and land elevation satellite-2 - Overview, science, and applications. In *IEEE Aerospace Conference Proceedings*, pp. 1–8. IEEE Computer Society. (doi:10.1109/AERO.2018.8396364)
10. Parrish CE, Magruder LA, Neuenschwander AL, Forfinski-Sarkozi N, Alonzo M, Jasinski M. 2019 Validation of ICESat-2 ATLAS Bathymetry and Analysis of ATLAS's Bathymetric Mapping Performance. *Remote Sens.* **11**, 1634. (doi:10.3390/rs11141634)
11. Davies AB, Asner GP. 2014 Advances in animal ecology from 3D-LiDAR ecosystem mapping. *Trends Ecol. Evol.* **29**, 681–691. (doi:10.1016/j.tree.2014.10.005)
12. Wedding LM, Friedlander AM, McGranaghan M, Yost RS, Monaco ME. 2008 Using bathymetric lidar to define nearshore benthic habitat complexity: Implications for management of reef fish assemblages in Hawaii. *Remote Sens. Environ.* **112**, 4159–4165. (doi:10.1016/J.RSE.2008.01.025)
13. Eitel JUH *et al.* 2016 Beyond 3-D: The new spectrum of lidar applications for earth and ecological sciences. *Remote Sens. Environ.* **186**, 372–392. (doi:10.1016/j.rse.2016.08.018)
14. Kalacska M, Chmura GL, Lucanus O, Bérubé D, Arroyo-Mora JP. 2017 Structure from motion will revolutionize analyses of tidal wetland landscapes. *Remote Sens. Environ.* **199**, 14–24. (doi:10.1016/J.RSE.2017.06.023)
15. Danson FM, Disney MI, Gaulton R, Schaaf C, Strahler A. 2018 The terrestrial laser scanning revolution in forest ecology. *Interface Focus* **8**, 20180001. (doi:10.1098/rsfs.2018.0001)
16. Anderson K, Gaston KJ. 2013 Lightweight unmanned aerial vehicles will revolutionize spatial ecology. *Front. Ecol. Environ.* **11**, 138–146. (doi:10.1890/120150)
17. Vierling KT, Vierling LA, Gould WA, Martinuzzi S, Clawges RM. 2008 Lidar: Shedding new


- light on habitat characterization and modeling. *Front. Ecol. Environ.* **6**, 90–98. (doi:10.1890/070001)
18. Heritage GL, Large ARG. 2009 *Laser scanning for the environmental sciences*. Wiley-Blackwell.
19. Eitel JUH, Vierling LA, Magney TS. 2013 A lightweight, low cost autonomously operating terrestrial laser scanner for quantifying and monitoring ecosystem structural dynamics. *Agric. For. Meteorol.* **180**, 86–96. (doi:10.1016/J.AGRFORMET.2013.05.012)
20. Buckley SJ, Howell JA, Enge HDD, Kurz THH. 2008 Terrestrial laser scanning in geology: data acquisition, processing and accuracy considerations. *J. Geol. Soc. London.* **165**, 625–638. (doi:10.1144/0016-76492007-100)
21. Orwig DA, Boucher P, Paynter I, Saenz E, Li Z, Schaaf C. 2018 The potential to characterize ecological data with terrestrial laser scanning in Harvard Forest, MA. *Interface Focus.* **8**, 20170044. (doi:10.1098/rsfs.2017.0044)
22. Dassot M, Constant T, Fournier M. 2011 The use of terrestrial LiDAR technology in forest science: Application fields, benefits and challenges. *Ann. For. Sci.* **68**, 959–974. (doi:10.1007/s13595-011-0102-2)
23. Maas H -G., Bienert A, Scheller S, Keane E. 2008 Automatic forest inventory parameter determination from terrestrial laser scanner data. *Int. J. Remote Sens.* **29**, 1579–1593. (doi:10.1080/01431160701736406)
24. Watt PJ, Donoghue DNM. 2005 Measuring forest structure with terrestrial laser scanning. *Int. J. Remote Sens.* **26**, 1437–1446. (doi:10.1080/01431160512331337961)
25. Cooper S, Roy D, Schaaf C, Paynter I. 2017 Examination of the Potential of Terrestrial Laser Scanning and Structure-from-Motion Photogrammetry for Rapid Nondestructive Field Measurement of Grass Biomass. *Remote Sens.* **9**, 531. (doi:10.3390/rs9060531)
26. Feliciano EA, Wdowinski S, Potts MD. 2014 Assessing Mangrove Above-Ground Biomass and Structure using Terrestrial Laser Scanning: A Case Study in the Everglades National Park. *Wetlands* **34**, 955–968. (doi:10.1007/s13157-014-0558-6)
27. Elsherif A, Gaulton R, Mills J. 2018 Estimation of vegetation water content at leaf and canopy level using dual-wavelength commercial terrestrial laser scanners. *Interface Focus* **8**, 20170041. (doi:10.1098/rsfs.2017.0041)
28. Azmy SN, Sah SAM, Shafie NJ, Ariffin A, Majid Z, Ismail MNA, Shamsir MS. 2012 Counting in the dark: Non-intrusive laser scanning for population counting and identifying roosting bats. *Sci. Rep.* **2**, 524. (doi:10.1038/srep00524)
29. McFarlane DA, Roberts W, Buchroithner M, Van Rentergem G, Lundberg J, Hautz S. 2015 Terrestrial liDAR-based automated counting of swiftlet nests in the caves of gomantong, Sabah, Borneo. *Int. J. Speleol.* **44**. (doi:10.5038/1827-806X.44.2.8)
30. Milan DJ, Heritage GL, Large ARG, Entwistle NS. 2010 Mapping hydraulic biotopes using terrestrial laser scan data of water surface properties. *Earth Surf. Process. Landforms* **35**, 918–931. (doi:10.1002/esp.1948)
31. Hollenbeck JP, Olsen MJ, Haig SM. 2014 Using terrestrial laser scanning to support ecological research in the rocky intertidal zone. *J. Coast. Conserv.* **18**, 701–714. (doi:10.1007/s11852-014-0346-8)
32. Hannam M, Moskal LM. 2015 Terrestrial laser scanning reveals seagrass microhabitat structure on a tideflat. *Remote Sens.* **7**, 3037–3055. (doi:10.3390/rs70303037)
33. Westoby MJ, Brasington J, Glasser NF, Hambrey MJ, Reynolds JM. 2012 ‘Structure-from-

- 570 Motion' photogrammetry: A low-cost, effective tool for geoscience applications.
571 *Geomorphology* **179**, 300–314. (doi:10.1016/j.geomorph.2012.08.021)
- 572 34. Cunliffe AM, Brazier RE, Anderson K. 2016 Ultra-fine grain landscape-scale quantification of
573 dryland vegetation structure with drone-acquired structure-from-motion photogrammetry.
574 *Remote Sens. Environ.* **183**, 129–143. (doi:10.1016/j.rse.2016.05.019)
- 575 35. James MR, Robson S, Smith MW. 2017 3-D uncertainty-based topographic change detection
576 with structure-from-motion photogrammetry: precision maps for ground control and directly
577 georeferenced surveys. *Earth Surf. Process. Landforms* **42**, 1769–1788.
578 (doi:10.1002/esp.4125)
- 579 36. Eltner A, Kaiser A, Castillo C, Rock G, Neugirg F, Abellán A. 2016 Image-based surface
580 reconstruction in geomorphometry-merits, limits and developments. *Earth Surf. Dyn.* **4**, 359–
581 389. (doi:10.5194/esurf-4-359-2016)
- 582 37. Wallace L *et al.* 2016 Assessment of Forest Structure Using Two UAV Techniques: A
583 Comparison of Airborne Laser Scanning and Structure from Motion (SfM) Point Clouds.
584 *Forests* **7**, 62. (doi:10.3390/f7030062)
- 585 38. Iglhaut J, Cabo C, Puliti S, Piermattei L, O'Connor J, Rosette J. 2019 Structure from Motion
586 Photogrammetry in Forestry: a Review. *Curr. For. Reports.* **5**, 155–168. (doi:10.1007/s40725-
587 019-00094-3)
- 588 39. Kalacska M, Lucanus O, Sousa L, Vieira T, Arroyo-Mora J. 2018 Freshwater Fish Habitat
589 Complexity Mapping Using Above and Underwater Structure-From-Motion Photogrammetry.
590 *Remote Sens.* **10**, 1912. (doi:10.3390/rs10121912)
- 591 40. Woodget AS, Carbonneau PE, Visser F, Maddock IP. 2015 Quantifying submerged fluvial
592 topography using hyperspatial resolution UAS imagery and structure from motion
593 photogrammetry. *Earth Surf. Process. Landforms* **40**, 47–64. (doi:10.1002/esp.3613)
- 594 41. Olsoy PJ, Shipley LA, Rachlow JL, Forbey JS, Glenn NF, Burgess MA, Thornton DH. 2018
595 Unmanned aerial systems measure structural habitat features for wildlife across multiple
596 scales. *Methods Ecol. Evol.* **9**, 594–604. (doi:10.1111/2041-210X.12919)
- 597 42. Bayley DTI, Mogg AOM, Koldewey H, Purvis A. 2019 Capturing complexity: field-testing
598 the use of 'structure from motion' derived virtual models to replicate standard measures of reef
599 physical structure. *PeerJ* **7**, e6540. (doi:10.7717/peerj.6540)
- 600 43. Storlazzi CD, Dartnell P, Hatcher GA, Gibbs AE. 2016 End of the chain? Rugosity and fine-
601 scale bathymetry from existing underwater digital imagery using structure-from-motion (SfM)
602 technology. *Coral Reefs* **35**, 889–894. (doi:10.1007/s00338-016-1462-8)
- 603 44. Leon JX, Roelfsema CM, Saunders MI, Phinn SR. 2015 Measuring coral reef terrain
604 roughness using 'Structure-from-Motion' close-range photogrammetry. *Geomorphology* **242**,
605 21–28. (doi:10.1016/j.geomorph.2015.01.030)
- 606 45. Nex F, Remondino F. 2014 UAV for 3D mapping applications: A review. *Appl. Geomatics* **6**,
607 1–15. (doi:10.1007/s12518-013-0120-x)
- 608 46. Mancini F, Dubbini M, Gattelli M, Stecchi F, Fabbri S, Gabbianelli G. 2013 Using Unmanned
609 Aerial Vehicles (UAV) for High-Resolution Reconstruction of Topography: The Structure
610 from Motion Approach on Coastal Environments. *Remote Sens.* **5**, 6880–6898.
611 (doi:10.3390/rs5126880)
- 612 47. Lague D, Brodu N, Leroux J. 2013 Accurate 3D comparison of complex topography with
613 terrestrial laser scanner: Application to the Rangitikei canyon (N-Z). *ISPRS J. Photogramm.*
614 *Remote Sens.* **82**, 10–26. (doi:10.1016/j.isprsjprs.2013.04.009)

- 615 48. Girardeau-Montaut D. 2019 CloudCompare.
- 616 49. Hillman S, Wallace L, Reinke K, Hally B, Jones S, Saldias DS. 2019 A Method for Validating
617 the Structural Completeness of Understory Vegetation Models Captured with 3D Remote
618 Sensing. *Remote Sens.* **11**, 2118. (doi:10.3390/rs11182118)
- 619 50. Cook KL. 2017 An evaluation of the effectiveness of low-cost UAVs and structure from
620 motion for geomorphic change detection. *Geomorphology* **278**, 195–208.
621 (doi:10.1016/J.GEOMORPH.2016.11.009)
- 622 51. Calders K, Phinn S, Ferrari R, Leon J, Armston J, Asner GP, Disney M. 2019 3D Imaging
623 Insights into Forests and Coral Reefs. *Trends Ecol. Evol.* (doi:10.1016/j.tree.2019.10.004)
- 624 52. Kovalenko KE, Thomaz SM, Warfe DM. 2012 Habitat complexity: Approaches and future
625 directions. *Hydrobiologia* **685**, 1–17. (doi:10.1007/s10750-011-0974-z)
- 626 53. Reichert J, Backes AR, Schubert P, Wilke T. 2017 The power of 3D fractal dimensions for
627 comparative shape and structural complexity analyses of irregularly shaped organisms.
628 *Methods Ecol. Evol.* **8**, 1650–1658. (doi:10.1111/2041-210X.12829)
- 629 54. Meager JJ, Schlacher TA. 2013 New metric of microhabitat complexity predicts species
630 richness on a rocky shore. *Mar. Ecol.* **34**, 484–491. (doi:10.1111/maec.12049)
- 631 55. Gratwicke B, Speight MR. 2005 The relationship between fish species richness, abundance
632 and habitat complexity in a range of shallow tropical marine habitats. *J. Fish Biol.* **66**, 650–
633 667. (doi:10.1111/j.0022-1112.2005.00629.x)
- 634 56. Dustan P, Doherty O, Pardede S. 2013 Digital Reef Rugosity Estimates Coral Reef Habitat
635 Complexity. *PLoS One* **8**, e57386. (doi:10.1371/journal.pone.0057386)
- 636 57. Milling CR, Rachlow JL, Olsoy PJ, Chappell MA, Johnson TR, Forbey JS, Shipley LA,
637 Thornton DH. 2018 Habitat structure modifies microclimate: An approach for mapping fine-
638 scale thermal refuge. *Methods Ecol. Evol.* **9**, 1648–1657. (doi:10.1111/2041-210X.13008)
- 639 58. Baltensweiler A, Walthert L, Ginzler C, Sutter F, Purves RS, Hanewinkel M. 2017 Terrestrial
640 laser scanning improves digital elevation models and topsoil pH modelling in regions with
641 complex topography and dense vegetation. *Environ. Model. Softw.* **95**, 13–21.
642 (doi:10.1016/j.envsoft.2017.05.009)
- 643 59. Helmuth B, Denny MW. 2003 Predicting Wave Exposure in the Rocky Intertidal Zone: Do
644 Bigger Waves Always Lead to Larger Forces? *Source Limnol. Oceanogr.* **48**, 1338–1345.
- 645 60. Lindegarth M, Gamfeldt L. 2005 Comparing categorical and continuous ecological analyses:
646 Effects of “wave exposure” on rocky shores. *Ecology* **86**, 1346–1357. (doi:10.1890/04-1168)
- 647 61. Caryl FM, Hahs AK, Lumsden LF, Van der Ree R, Wilson C, Wintle BA. 2014 Continuous
648 predictors of species distributions support categorically stronger inference than ordinal and
649 nominal classes: an example with urban bats. *Landsc. Ecol.* **29**, 1237–1248.
650 (doi:10.1007/s10980-014-0062-7)
- 651 62. Rodriguez AB *et al.* 2014 Oyster reefs can outpace sea-level rise. *Nat. Clim. Chang.* **4**, 493–
652 497. (doi:10.1038/nclimate2216)
- 653 63. Calders K *et al.* 2015 Nondestructive estimates of above-ground biomass using terrestrial laser
654 scanning. *Methods Ecol. Evol.* **6**, 198–208. (doi:10.1111/2041-210X.12301)
- 655 64. Honkavaara E, Litkey P, Nurminen K, Honkavaara E, Litkey P, Nurminen K. 2013 Automatic
656 Storm Damage Detection in Forests Using High-Altitude Photogrammetric Imagery. *Remote
657 Sens.* **5**, 1405–1424. (doi:10.3390/rs5031405)
- 658 65. Murfitt SL, Allan BM, Bellgrove A, Rattray A, Young MA, Ierodiaconou D. 2017


- 659 Applications of unmanned aerial vehicles in intertidal reef monitoring. *Sci. Rep.* **7**, 1–11.
660 (doi:10.1038/s41598-017-10818-9)
- 661 66. Guan H, Yu Y, Ji Z, Li J, Zhang Q. 2015 Deep learning-based tree classification using mobile
662 LiDAR data. *Remote Sens. Lett.* **6**, 864–873. (doi:10.1080/2150704X.2015.1088668)
- 663 67. Levin SA. 1992 The Problem of Pattern and Scale in Ecology: The Robert H. MacArthur
664 Award Lecture Author(s): Simon A. Levin Source: *Ecology* **73**, 1943–1967.
665 (doi:doi:10.2307/1941447)
- 666 68. Wheatley M, Johnson C. 2009 Factors limiting our understanding of ecological scale. *Ecol.*
667 *Complex.* **6**, 150–159. (doi:10.1016/J.ECOCOM.2008.10.011)
- 668 69. Vanden Borre J, Paelinckx D, Mùcher CA, Kooistra L, Haest B, De Blust G, Schmidt AM.
669 2011 Integrating remote sensing in Natura 2000 habitat monitoring: Prospects on the way
670 forward. *J. Nat. Conserv.* **19**, 116–125. (doi:10.1016/J.JNC.2010.07.003)
- 671 70. Ramirez-Reyes C *et al.* 2019 Reimagining the potential of Earth observations for ecosystem
672 service assessments. *Sci. Total Environ.* **665**, 1053–1063.
673 (doi:10.1016/J.SCITOTENV.2019.02.150)
- 674 71. Wilkinson MW, Jones RR, Woods CE, Gilment SR, McCaffrey KJW, Kokkalas S, Long JJ.
675 2016 A comparison of terrestrial laser scanning and structure-from-motion photogrammetry as
676 methods for digital outcrop acquisition. *Geosphere* **12**, 1865–1880. (doi:10.1130/GES01342.1)
- 677 72. Edwards CB, Eynaud Y, Williams GJ, Pedersen NE, Zgliczynski BJ, Gleason ACR, Smith JE,
678 Sandin SA. 2017 Large-area imaging reveals biologically driven non-random spatial patterns
679 of corals at a remote reef. *Coral Reefs* **36**, 1291–1305. (doi:10.1007/s00338-017-1624-3)
- 680 73. Ashcroft MB, Gollan JR, Ramp D. 2013 Creating vegetation density profiles for a diverse
681 range of ecological habitats using terrestrial laser scanning. *Methods Ecol. Evol.* **5**, 263–272.
682 (doi:10.1111/j.2041-210X.2013.12157.x)
- 683 74. Richardson JJ, Moskal LM, Bakker JD. 2014 Terrestrial laser scanning for vegetation
684 sampling. *Sensors (Basel)*. **14**, 20304–19. (doi:10.3390/s141120304)
- 685 75. Bryson M, Ferrari R, Figueira W, Pizarro O, Madin J, Williams S, Byrne M. 2017
686 Characterization of measurement errors using structure-from-motion and photogrammetry to
687 measure marine habitat structural complexity. *Ecol. Evol.* **7**, 5669–5681.
688 (doi:10.1002/ece3.3127)
- 689 76. Duffy JP, Cunliffe AM, DeBell L, Sandbrook C, Wich SA, Shutler JD, Myers-Smith IH,
690 Varela MR, Anderson K. 2018 Location, location, location: considerations when using
691 lightweight drones in challenging environments. *Remote Sens. Ecol. Conserv.* **4**, 7–19.
692 (doi:10.1002/rse2.58)

693

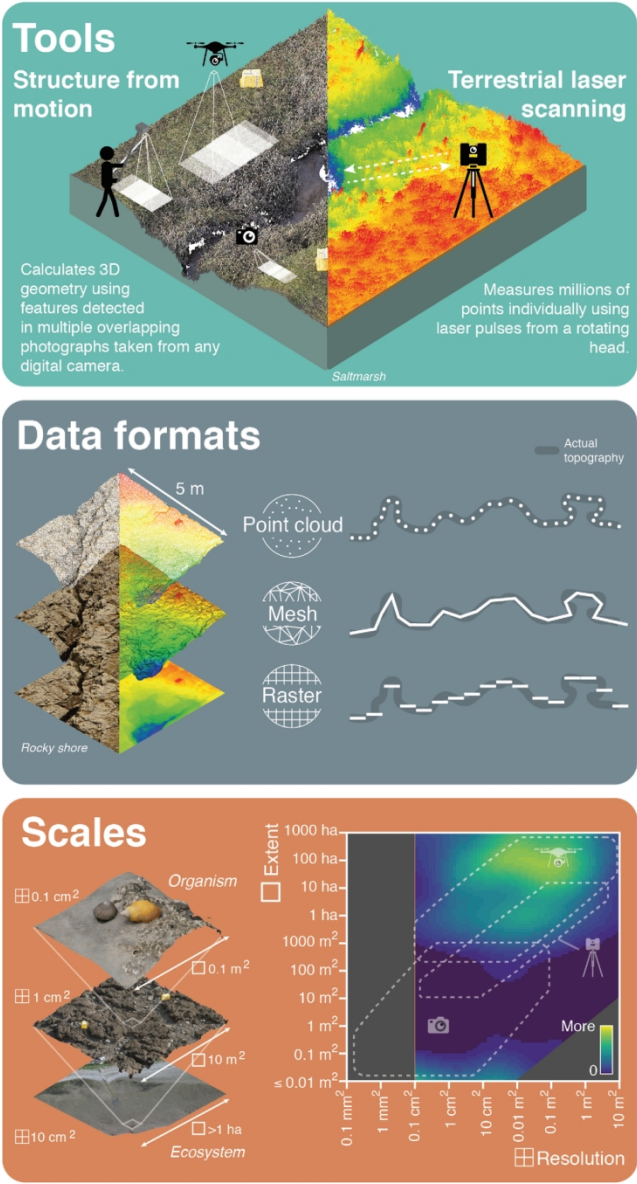


An overview of high-resolution three-dimensional ecosystem mapping tools, data formats and scales. Tools include terrestrial laser scanning and structure-from-motion photogrammetry. Point cloud data can be processed into mesh formats by interpolating between points, and raster formats to produce digital elevation models (DEMs) by averaging point elevations in a regular 2D grid. 3D information can be analysed at multiple spatial scales from organism to ecosystem. These tools enable investigation at spatial scales (resolution and extent) that are understudied in ecology. Plot shading (adapted from [3]) indicates number of ecological studies at specific scales, dashed areas represent the approximate sampling scales for terrestrial laser scanning and structure-from-motion (using drone-mounted and handheld cameras).

86x158mm (300 x 300 DPI)

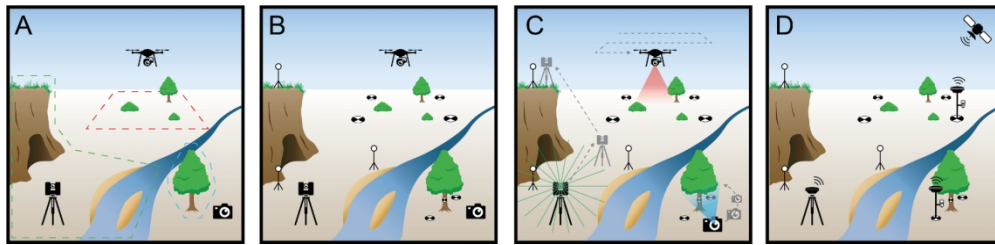


Major steps for capturing data with terrestrial laser scanning and structure-from-motion using handheld and drone-mounted cameras. A) Identify features of interest and estimate scanning positions or camera angles. B) Set out reference targets for terrestrial laser scanning, or ground control points, check points and scaling objects for structure-from-motion. For laser scanning, targets are used to align data from different stations, although scene geometry can sometimes be used for alignment instead of, or in addition to targets. For structure-from-motion, reference points are used for aligning images and constraining the modelling process, and for accuracy assessment and scaling. C) Terrestrial laser scanning collects data from a number of discrete stations, to be combined during processing. For structure-from-motion, many overlapping photographs are taken, from which a 3D model is generated during processing. D) Georeferencing, typically using a commercial grade Global Navigation Satellite System, is required to position the resulting 3D models in real-world space, and for scaling in large structure-from-motion models.

159x38mm (300 x 300 DPI)

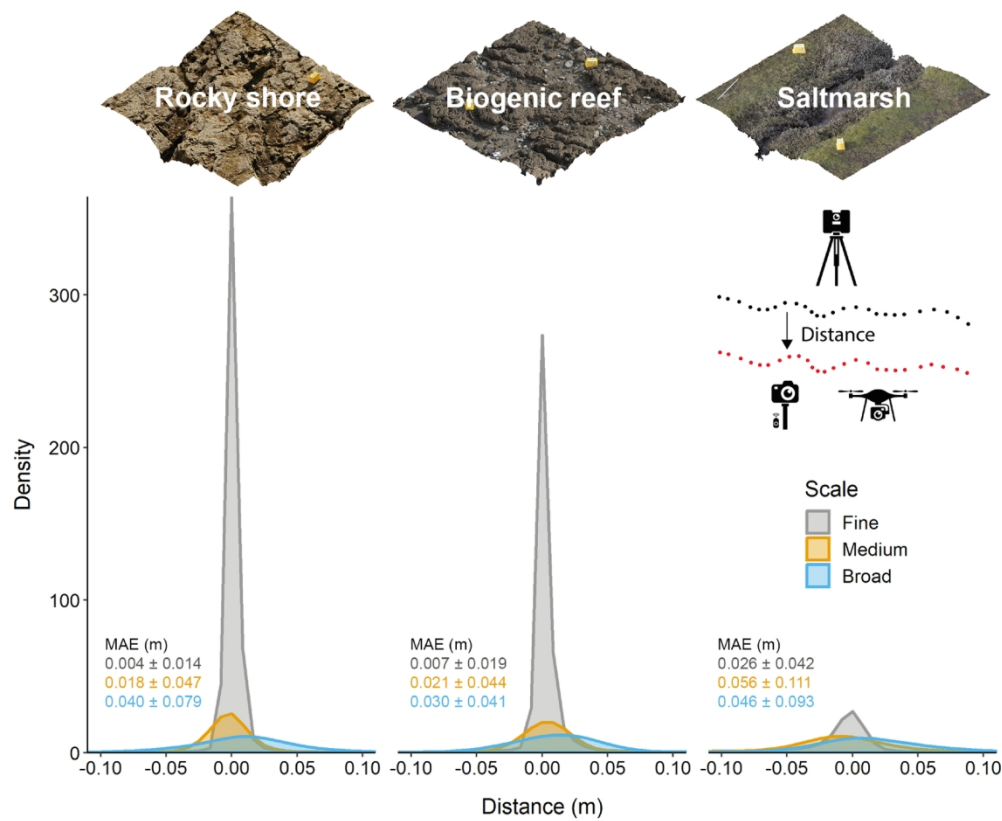

Accuracy of a structure-from-motion point cloud quantified as the point-by-point distance to a reference terrestrial laser scanning point cloud in three habitats (rocky shore, biogenic reef and saltmarsh) and at three scales (fine: 25 m² with < 1 cm resolution, medium: 2500 m² with < 2 cm resolution and broad: 2500 m² with 5 cm resolution). Distances were measured at 100,000 points and plotted as density curves, with the area under each curve being equal. Curve tails beyond 0 ± 0.1 m are not shown. Mean absolute error (MAE) ± 1 standard deviation (m) distance is reported.

150x126mm (300 x 300 DPI)

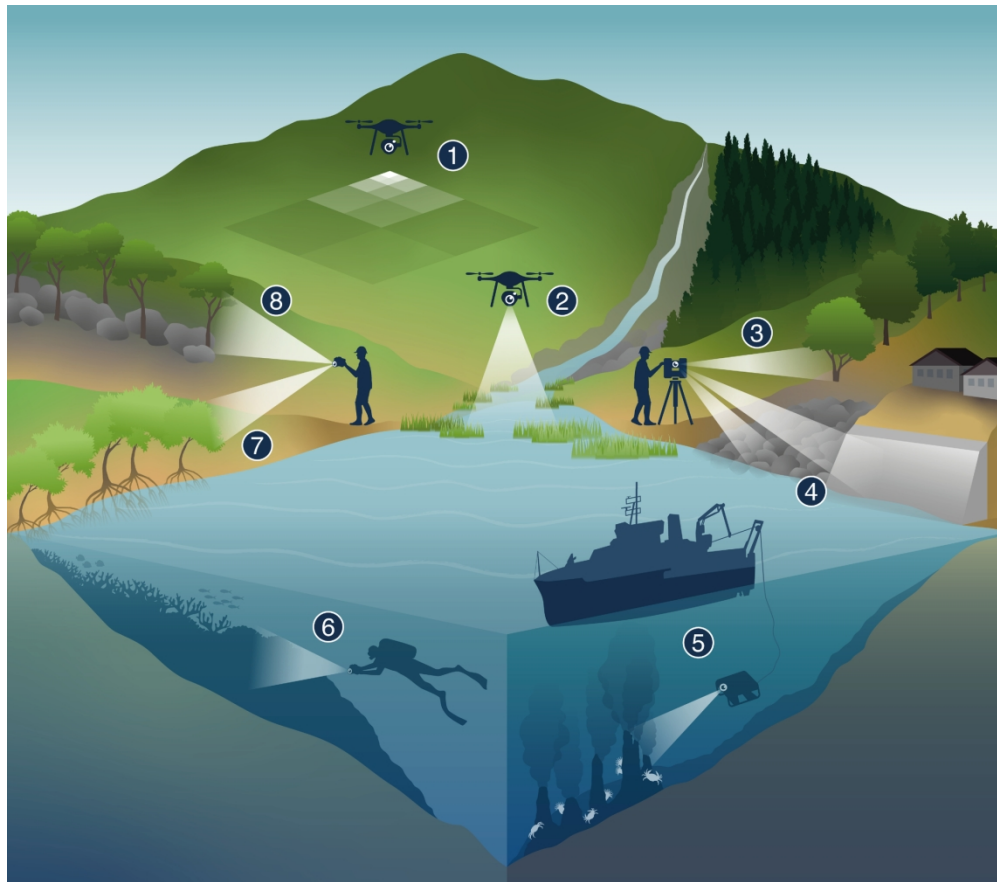

Examples in ecology and environmental management with existing or potential applications for 3D ecosystem mapping. 1) Multiscale experimental design with high-resolution 3D mapping across large extents. 2) Mapping fine-scale variation in topography across tidal flats and wetlands. 3) Automated species identification and biometric measurement in forests. 4) Comparing topographic variation in natural and artificial hard coastal substrates. 5) Digital archiving of 3D habitat structure in inaccessible ecosystems. 6) Monitoring variation in reef topography in space and time. 7) Modelling growth in complex 3D organisms like mangrove trees. 8) Mapping 3D structure in habitats with canopy cover and overhangs.

171x150mm (300 x 300 DPI)